


cat. no. 110.85

Circulating unit

CIRCULATING UNIT ADDITIONAL COVERING

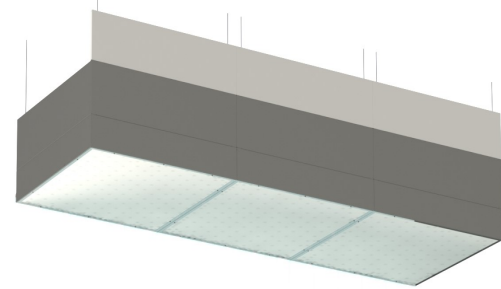

The additional covering of the upper area above the circulating unit is designed with individual metal panels, as specified in Section S3, S4 and combination thereof. The preferred dimensions are 625 and 1250 mm for circulating units 625x1250, 1250x1250.

The additional covering height is variable and depends on the unit's suspension height under the suspended ceiling. The specified dimension is measured from the top edge of the circulating unit to the bottom edge of the suspended ceiling.

The covers are anchored using a 50x50mm angle piece directly into the CU and the suspended ceiling.

MORE INFORMATION, PHOTOS



TECHNICAL DATA

Type

CU covering

Covering height - V

Cover height (mm)

Cover length

Cover width 1250 mm

Cover shortened size 1232 mm

Cover shortened size 1214 mm

Cover width 625 mm

Cover shortened size 607 mm

Cover shortened 589 mm

Cover with different dimension

Cover shade and material

Galvanized metal sheet, RAL 9016 hue

AISI 304 stainless steel

Komaxit in RAL hue

Atypical design

Standard design

Atypical design

Type design 0 - unambiguous specification from the offered options; Atypical design Q - atypical solution that cannot be unambiguously specified by code